




trutestTM
DETECTOR SENSITIVITY TESTER

Smoke Detector Sensitivity Test Equipment



detectortesters
testing technology from No Climb

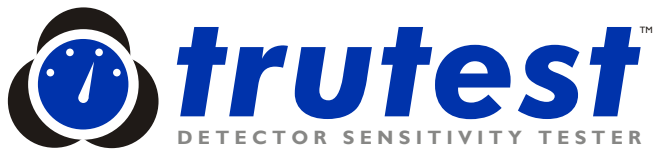

Trutest enables fire alarm technicians to measure the sensitivity of installed smoke detectors quickly, accurately, easily, and professionally.

WHY TEST DETECTOR FUNCTION AND SENSITIVITY?

Detector sensitivity can, and does, drift. Over-sensitivity leads to false alarms, under-sensitivity to late alarms - or no alarms. The need for functional testing through introducing a smoke type stimulus is well recognised:

“Since stimulus of the sensing element through introduction of the phenomena or surrogate phenomena which the detectors are designed to detect forms part of the test(s), use of a test button or a test magnet (for example) or compliance with 45(i) (confirmation of analogue values) does not satisfy the recommendations..”

BS 5839 I: 2002 45.3 (Note 4)

“The detectors shall be tested in place to ensure smoke entry into the sensing chamber and an alarm response. Testing with smoke or listed aerosol...shall be permitted as acceptable test methods...”

USA NFPA 72 2000 Table 10.4.2.2 13.g.1

“Each smoke detector shall be tested for operation by introducing smoke or simulated smoke into the detecting chamber...”

CAN/ULC - S-536-04, 5.7.4.1.2

But the requirement for sensitivity checks is also clear in national standards:

“...tests shall be performed to ensure that each smoke detector is within its listed and marked sensitivity range...”

USA NFPA 72 2000 Table 10.4.2.2 13.g.1

“...each detector shall be tested to confirm that it is within its rated operating range...”

CAN/ULC - S536-04, 5.7.4.1.3

With its measured introduction of listed smoke aerosol to the sensing chamber of the installed detector, Trutest enables the functional and sensitivity checks to be combined within a single, cost effective test.

The leading device of its type today, Trutest adds to system integrity, while saving time, labor and money.

A revolutionary product, Trutest not only introduces a smoke test aerosol through the vents of the installed detector to the sensing chamber, but operates using a precision closed loop system - measuring smoke obscuration and feeding back information to a controlling microprocessor.

- Reduces false alarms - a huge problem in the industry
- Verifies the protection you need from your detector
- Battery operated and light
- Simple to use
- Suits most detectors
- Calibrated in % / ft
- Tests installed detectors
- Self calibrates before testing
- Measures actual sensitivity



APPLIES TO BOTH CONVENTIONAL AND INTELLIGENT SYSTEMS

CONVENTIONAL DETECTORS

These detectors have no means of measuring their own sensitivity. Their sensitivity drifts, and so it should be tracked over a period of time, using Trutest.

ANALOG/INTELLIGENT DETECTORS

Interrogating the fire system panel of an intelligent system enables, at best, a check of the value of 'clean air' response levels. It does not verify the condition of the vents or ability of the detector to receive smoke into its sensing chamber. Correlating an unmeasured smoke source (e.g. hand-held can of smoke) with a panel interrogation also does not produce a quantified test, as US NFPA 72 confirms:

"...The detector sensitivity shall not be measured using any device that administers an unmeasured concentration of smoke or other aerosol into the detector".

NFPA 72 2007 (10.4.4.2.6)

GENUINE 'ONE TEST' MEASUREMENT

Some standards permit sensitivity test frequencies to be extended after proven detector stability. This relies on tracking drift, which can be done only by measuring actual sensitivity readings. Trutest does not need two tests to check the upper and lower limits (which, in itself, does not establish actual sensitivity). Just one test provides an actual reading in % / ft which can be compared year on year to establish drift. Other features include:

- Auto self calibration before each test
- Telescopic adjustment to over 20ft / 6m
- Battery charge for a complete day's testing
- All hardware supplied in kit price quoted

REALLY SIMPLE TO USE

- Assemble with ease
- Offer up to detector
- Select detector type and profile
- Start test
- Smoke level automatically increases until detector goes into alarm
- Stop test and take reading

By introducing a measured and controlled smoke stimulus into the sensing chamber, Trutest enables cross-references to be made between the independent Trutest readings and the analog readings from the system panel. Only in this way can a true test of intelligent systems be achieved.



Trutest Control Panel

Trutest 800 Kit

Trutest accuracy for sensitivity measurements:

Note: Specified at 68°F +/- 5°F < 60% RH using slow ramp.

All detector types and profiles:	±(10% of reading + 0.6 %/ft) typically ±(10% of reading + 0.3 %/ft)
Size of detectors	All diameters from 2.8in/71mm to 5.7in/145mm

Operating parameters:

Maximum working height:	20ft 8ins (6.3m)
Average test tim	120 seconds (1%/ft/minute fast ramp, 0.5%/ft/minute slow ramp)
Average calibration time:*	40 seconds
Average clearing time:*	120 seconds
Average tests per aerosol caniste	100 tests
Maximum obscuration for ionization:	4.00 %/ft
Maximum obscuration for photoelectri	6.00 %/ft
Resolution:	0.01 %/ft
Average battery life:	8-10 hours testing on a full charge

*can be conducted whilst walking between detectors

Type of aerosol:

Environmentally friendly, non-flammable, non toxic
Safety Data Sheet available on request

Calibration & servicing:

In operation:	Self-calibrates before each test
Servicing intervals:	1 year recommended, but max interval 5000 tests

Environment:

Operating temperature:	50°F to 95°F (+10°C to +35°C)
Storage temperature:	15°F to 120°F (-10°C to +50°C) (Do not store in direct sunlight)
Humidity:	0 - 85% RH non-condensing
Weight of main unit (incl. aerosol canister):	6lb 9oz (3kg)

Because our policy is one of continuous improvement, details described within this publication are subject to change without notice.

Ordering information:

Trutest 800:	Complete kit with telescopic pole
Trutest 801:	Kit for users who already own SOLO 100 telescopic pole
Smoke 400:	Smoke aerosol for Trutest - minimum order 12 canisters

Please specify country of use when ordering.



Trutest is fully compatible with the Solo range of detector maintenance tools including:

Solo 330 Smoke Detector Tester

- Functional smoke testing



Solo 461 Cordless Heat Detector Tester

- Functional heat testing



Solo 200 Universal Detector Removal Tool

- Adjustable to allow removal and replacement of various size detectors.



Solo 101 Extension Pole

- Allows access up to 30ft. / 9m.

